

DH-HAC-HDBW1200R-Z

2MP HDCVI IR Dome Camera



- Max 30fps@1080P
- CVI/CVBS/AHD/TVI switchable
- 2.7-12mm motorized lens
- Max. IR length 30m, Smart IR
- IP67, IK10, DC12V



System Overview

Experience 1080P full HD video and the simplicity of using existing cabling infrastructure with HDCVI. The Lite series 1080P HDCVI camera features a compact design and offers a high quality image at a friendly price. It offers various motorized/fixed lens models with a multi-language OSD and HD/SD switchable output. Its structural flexibility and high cost-performance makes the camera an ideal choice for SMB solutions.

Functions

4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals to be transmitted over 1 coaxial cable simultaneously, i.e. video, audio*, data and power. Dual-way data transmission allows the HDCVI camera to interact with the XVR, such as sending control signal or triggering alarm. Moreover, HDCVI technology supports PoC for construction flexibility.

* Audio input is available for some models of HDCVI cameras.

Long Distance Transmission

HDCVI technology guarantees real-time transmission at long distance without any loss. It supports up to 800m(1080p)/1200m(720P) transmission via coaxial cable, and up to 300m(1080P)/450m(720P) via UTP cable.*

*This function is available for select models.

Simplicity

HDCVI technology inherits the born feature of simplicity from traditional analog surveillance system, making itself a best choice for investment protection. HDCVI system can seamlessly upgrade the traditional analog system without replacing existing coaxial cabling. The plug and play approach enables full HD video surveillance without the hassle of configuring a network.

Smart IR

The camera is designed with IR LED illumination for best lowlight performance. Smart IR is a technology to ensure brightness uniformity in B/W image under low illumination. Dahua's unique Smart IR adjusts to the intensity of camera's infrared LEDs to compensate for the distance of an object, and prevents IR LEDs from overexposing images as the object come closer to the camera.

Multi-formats

The camera supports multiple video formats including HDCVI, CVBS and other two common HD analog formats in the market. The four formats can be switched over through OSD menu or by PFM820(UTC controller). This feature makes the camera to be compatible with most end users' existing HD/SD DVRs.

Multi-language OSD

OSD menu provides multiple image adjustments and function settings to meet the requirements of different monitoring scenes. The OSD menu includes configurations such as backlight mode, day/night, white balance, privacy mask and motion detect. The camera supports 11 languages for OSD menu, namely, Chinese, English, French, German, Spanish, Portuguese, Italian, Japanese, Korean, Russian and Polish.

Protection

The camera's outstanding reliability is unsurpassed due to its rugged design. The camera is protected against water and dust with IP67 ranking, making it suitable for indoor or outdoor environments.

The camera complies with an IK10 vandal resistance rating making it capable of withstanding the equivalent of 5 kg (11.02 lbs) of force dropped from a height of 40 cm (15.75 in).

With working temperature range of -30 °C to +60 °C (-22 °F to +140 °F), the camera is designed for extreme temperature environments.

Supporting ±30% input voltage tolerance, this camera suits even the most unstable power supply conditions. Its 4KV lightning rating provides protection against the camera and its structure from the effects of lightning.

Technical Specification					
Camera					
Image Sensor		1/2.7 inch CMOS			
Effective Pixels		1920(H)×1080(V), 2MP			
Scanning System		Progressive			
Electronic Shutter Speed		PAL: 1/25s~1/100000s NTSC: 1/30s~1/100000s			
S/N Ratio		>65dB			
Minimum Illumination		0.02Lux/F1.7, 30IRE, 0Lux IR on			
Fill Light Working Distance		30 m (98.4 ft)			
IR On/Off Control		Auto; manual			
IR LED Number		2			
Pan/Tilt/Rotation Range		Pan: 0°~355° Tilt: 0°~75° Rotation: 0°~355°			
Lens					
Lens Type		Motorized vari-focal			
Auto Focus		N/A			
Mount Type		φ14			
Focal Length		2.7 mm-12 mm			
Max. Aperture		F1.7			
Field of View		Diagonal: 38°~125° Horizontal: 33°~102° Vertical: 19°~53°			
Iris Type		Fixed iris			
Close Focus Distance		1.2 m (3.9 ft)			
DORI Distance		Detect	Observe	Recognize	Identify
	2.7mm	49.7 m (163.1 ft)	19.9 m (65.3 ft)	9.9 m (32.5 ft)	5 m (16.4 ft)
	12mm	82.8 m (271.7 ft)	33.1 m (108.6 ft)	16.6 m (54.5 ft)	8.3 m (27.2 ft)
Video					
Frame Rate		CVI: 1080P@25/30fps; 720P@25/30fps; 720P@50/60fps; AHD: 1080P@25/30fps; 720P@25/30fps; TVI: 1080P@25/30fps; 720P@25/30fps; 720P@50/60fps; CVBS: 960H			
Resolution		1080P (1920×1080); 720P (1280×720); 960H (960×576/960×480)			
Day/Night		Auto switch by ICR			
BLC		BLC/HLC/DWDR			
WDR		DWDR			
White Balance		Auto; manual			
Gain Control		Auto; manual			
Noise Reduction		2D NR			
Smart IR		Yes			
Certifications					
Certifications		CE (EN55032:2015, EN 61000-3-2:2014, EN 61000-3-3:2013, EN55024:2010+A1:2015, EN 55035:2017, EN50130-4:2011+A1:2014) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014) UL (UL60950-1+CAN/CSA C22.2 No.60950-1)			
Port					
Video Output		Video output choices of CVI/TVI/AHD/CVBS by one BNC port			
Power					
Power Supply		12V ±30% DC			
Power Consumption		Max 6.3W (12V DC, IR on)			
Environment					
Operating Temperature		-30°C to +60°C (-22°F to 140°F);<95% (non-condensation)			
Storage Temperature		-30°C to +60°C (-22°F to 140°F);<95% (non-condensation)			
Protection Grade		IP67, IK10			
Structure					
Casing		Plastic dome cover+mental upper casing+mental pedestal			
Camera Dimensions		φ122.0 mm × 88.9 mm (φ4.80" × 3.50")			
Net Weight		0.44 Kg (0.97 lb)			
Gross Weight		0.7 Kg (1.54 lb)			

Ordering Information

Type	Part Number	Description
2MP Camera	DH-HAC-HDBW1200RP-Z 2.7-12mm	
	DH-HAC-HDBW1200RN-Z 2.7-12mm	2MP HDCVI IR Dome Camera
	PFA123	IP66 Junction box
	PFA137	Junction box
	PFB203W	Wall Mount Bracket (For use alone or with PFA152-E)
	PFA152-E	Pole Mount Bracket (For use with PFB203W)
	PFB220C	Ceiling Mount Bracket (For use with PFA106)
Accessories	PFA106	Mount Adapter (For use with PFB220C)
	PFB220C	Ceiling Mount Bracket
	PFM800-E	Passive HDCVI Balun
	PFM321D	12V 1A Power Adapter
	PFM820	UTC Controller
	PFM904	Integrated Mount Tester

Accessories

Optional:



PFA123
IP66 Junction box



PFA137
Junction box



PFB203W
Wall Mount Bracket
(For use alone or with
PFA152-E)



PFA152-E
Pole Mount Bracket (For
use with PFB203W)



PFB220C
Ceiling Mount Bracket
(For use with PFA106)



PFA106
Mount Adapter (For
use with PFB220C)



PFM800-E
Passive HDCVI Balun




PFM321D
12V 1A Power Adapter



PFM820
UTC Controller



PFM904
Integrated Mount Tester

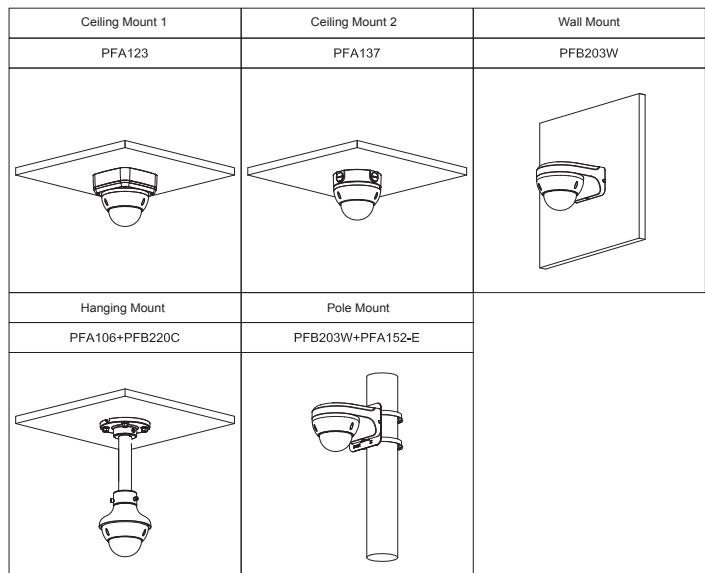

Dimensions (mm[inch])

